




The SKR110 Series Lubricator is a world class industrial grease pump with guaranteed performance and a hassle free track record of over 30 years. This double acting, 50:1 air operated pump is designed to work in tough conditions. From the workshop to the production line, the SKR110 has got you covered.

Features and Benefits

- ◆ Lightweight, corrosion-resistant head casting built for continuous duty.
- ◆ Faster output. Double-acting design provides high pressure and uniform delivery on both up and down strokes.
- ◆ Precision-machined, hardened steel valve, plunger and bushing resist abrasion and prolong pump life.
- ◆ Micro-lapped to high precision tolerance to eliminate bypassing lubricant.
- ◆ Pneumatically controlled lift assist for ease of pail change
- ◆ The drum trolley allows the system to be moved around the production floor with ease
- ◆ Standard follower wipes 35 lb. drum sides clean and keeps the drum primed
- ◆ All pumps are 100% pneumatically tested to assure quality performance.
- ◆ Backed by the most extensive, qualified service network in the industry.





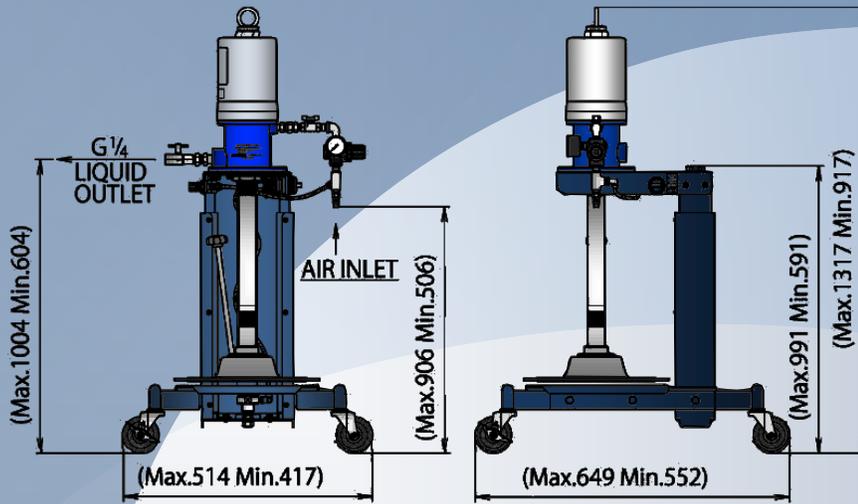

SKR110 Includes

- Pump Assembly
- Lift Assembly
- Dolly w/Castors
- Flange and Inductor Plate
- Valves & Regulators

Ratio	50:1
Discharge Port	Check Valve G1/4
Grease	NLGI No. 0-3
Air Inlet Pressure	30-100 PSI
Operating Pressure	1500-5000 PSI
Maximum Noise	80 dB
Temperature Range	32° F - 104° F (0-40°C)
Weight	75 lbs (34 KG)

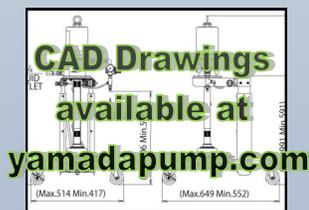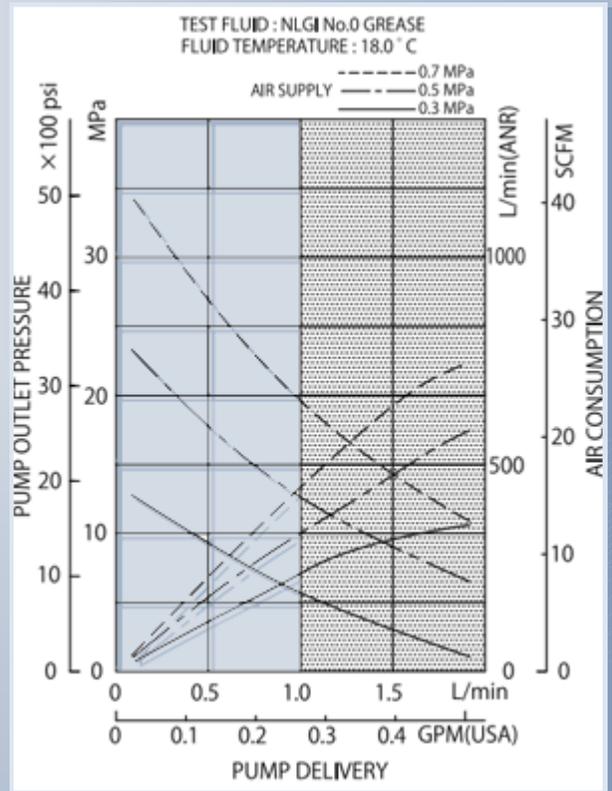

Yamada® is a registered trademark of Yamada America, Inc. Hytel® is a registered trademarks of E.I. du Pont de Nemours and Company. Santoprene® is a registered trademark of Advanced Elastomer Systems. Viton® is a registered trademark of DuPont Performance Elastomers. Kynar is a registered trademark of Arkema Inc. Due to Yamada's continued commitment to product improvement, specifications may change without notice.

Label:

