

**Gardner
Denver**

MIST ELIMINATORS

FME Series



FME Series Mist Eliminator

The Gardner Denver FME Series mist eliminators are the auditor's choice to reduce energy costs and remove oil and water aerosols from compressed air systems. The FME Series protects products and processes from contamination, increases the life of pneumatic equipment, eliminates paint appearance and adhesion problems and ultimately keeps pneumatic instruments operating.

Low Operating Costs

- Low pressure drop: 0.5 to 1 psi (0.04 to 0.07 kgf/cm²) Typical coalescing filters operate at 3 to 6 psi (0.21 to 0.42 kgf/cm²) requiring the air compressor to operate at higher operating pressures, increasing power requirements by 2.5% or more
- Long element life: 8 to 15 years
- With a large in-depth bed, element life is much longer than conventional oil removal filters
- Virtually maintenance free

Extra Protection

- Captures and retains large slugs of oil and water, should drain trap fail
- Protects downstream equipment from contamination should oil separator on rotary screw compressor fail

Removes Submicronic Particles for Ultra Clean Air

- 100% of particles 3 microns and larger
- 99.98% of particles 0.1 micron and larger
- 0.5 ppm w/w maximum liquid content after filtration
- 1000 ppm maximum inlet liquid loading




SPECIFICATIONS

MODEL NUMBER	FLOW @ 100 PSIG (7 KGf/CM ²)		MAXIMUM WORKING PRESSURE	MAXIMUM OPERATING TEMP	REPLACEMENT CARTRIDGE	DIMENSIONS				CONNECTIONS	WEIGHT	
	SCFM	M ³ /H				HEIGHT IN	HEIGHT MM	WIDTH IN	WIDTH MM		LBS	KG
FME1	125	200	150 psig (14.1 kgf/cm ²)	150° F (66° C)	FME1E	34.8	884	18.0	457	2" NPT	185	84
FME2	250	440			FME2E	34.8	884	18.0	457	2" NPT	190	86
FME3	500	870			FME3E	45.0	1143	18.0	457	2 ½" NPT	220	100
FME4	1100	1910			FME4E	63.3	1608	23.8	605	4" ANSI FLG	350	159
FME5	1500	2600			FME5E	70.8	1789	25.8	655	4" ANSI FLG	390	177
FME6	2100	3650			FME6E	72.4	1839	31.8	808	4" ANSI FLG	700	318
FME7	2400	4170			FME7E	72.4	1839	31.8	808	4" ANSI FLG	715	324
FME8	3000	5210			FME8E	72.4	1839	31.8	808	4" ANSI FLG	730	331

CORRECTION FACTORS FOR INLET PRESSURE

INLET PRESSURE		MULTIPLIER
PSIG	KGf/CM ²	
20	1.4	0.30
30	2.1	0.39
40	2.8	0.48
60	4.2	0.65
80	5.6	0.82
100	7.0	1.00
120	8.4	1.17
150	10.5	1.43

Sizing: Maximum air flow at 100 psig (7 kgf/cm²) is indicated in the Specifications table. To determine maximum air flow at pressures other than 100 psig (7 kgf/cm²), multiply flow @ 100 psig (7 kgf/cm²) by the multiplier from Table 2 that corresponds to the minimum operating pressure at the inlet to the filter.

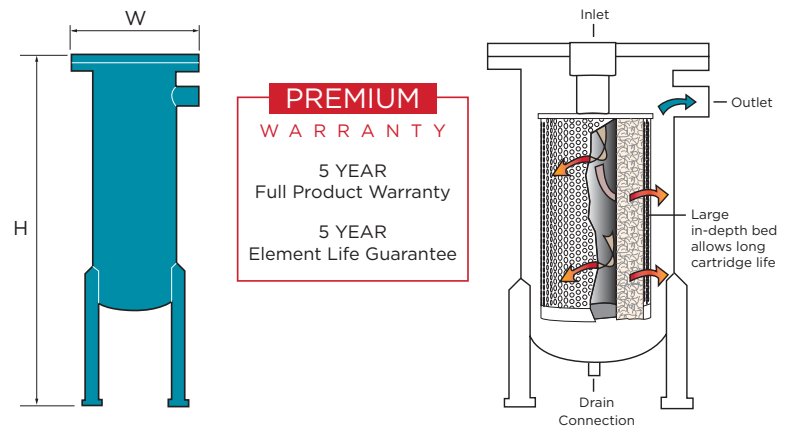

Standard Features

- Differential pressure gauge
- Heavy duty ASME stamped pressure vessel
- Long life mist eliminator element
- Floor stand

Options

- Automatic condensate drains
 - Pneumatically or electrically operated
- Differential pressure gauge with reed switch

Advanced Filter Bed Technology

Compressed air is directed through a loosely packed bed of highly engineered, water resistant glass fibers. Water droplets and oil aerosols entrained in the air stream are captured by the fibers through the mechanisms of direct interception, inertial impaction, and interception resulting from Brownian motion. The captured aerosols move along the fibers and coalesce into larger droplets that gravitate to the bottom of the housing and are discharged from the system by an optional automatic drain valve.

The leader in every market we serve
by continuously improving all business processes
with a focus on innovation and velocity

**Gardner
Denver**[®]


Gardner Denver, Inc.

1800 Gardner Expressway
Quincy, IL 62305
866-440-6241

www.gardnerdenver.com/gdproducts



©2018 Gardner Denver, Inc. Printed in U.S.A.
GA-FME 1st Ed. 1/18
Supersedes GA-FME-102 1st Ed. 4/14

 Please recycle after use.