

# KPL-24 / EPL-100

## Electric Powered Grease Lubricator

The **KPL-24 / EPL-100** is an electrically powered grease lubricator specifically designed for use on heavy construction equipment.

Cut your maintenance budget in half! With a KPL-24 / EPL-100, manual lubrication is a breeze.

Reliability is paramount! Over 20 years of proven field service.

For the KPL-24 24-volt DC electric connection means no tapping hydraulic or pneumatic lines. Hassle free installation!

For the EPL-100, plug it in and it's ready to go!

Versatile! Can be utilized as a stand alone or a Centralized Lubrication System (CLS).



**Construction Equipment**




**Mining Equipment**



**Wind Turbines**

Featured as the  
**lubrication system**  
of choice on most heavy  
construction equipment!!

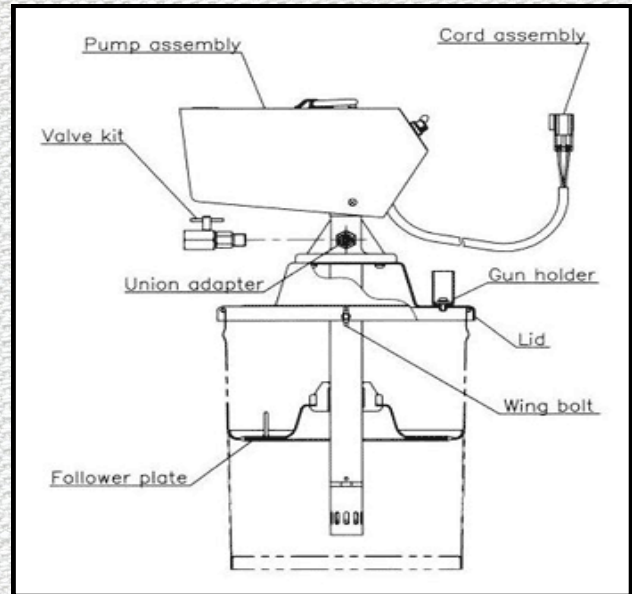

# KPL-24 / EPL-100

## Electric Powered Grease Lubricator

### --- Features ---

- High discharge pressure - 4000 psi max.
- Engineered specifically for 5 gallon grease pail. The revolutionary design of the follower plate will empty the container completely.
- The KPL-24 uses 24-volt DC operation.
- The EPL-100 operates on 120V single phase power.
- Tried and True!
- These pumps are both sturdy and reliable.
- Mount it on a truck with hose reel and gun for manual lubrication.
- These pumps may also be used in conjunction with a distribution box and a timer for automatic lubrication.



SPECIFICATIONS	KPL-24	EPL-100
Rating	Continuous Rating	30 Minute Rating
Discharge Volume	80 - 120 Grams/min	70 - 80 Grams/min
Discharge Pressure	0 - 3450 PSI	3450 - 4000 PSI
Max. Discharge Pressure	4000 PSI(30 minute rating)	
Revolution per hour	95 - 108 RPM	
Power Supply	24V DC	120V AC
Vibration Resistance	4G	
Applicable Grease	NLGI No. 0 - 2	
Applicable Temperature	14°F - 104°F	
Weight	26 lbs.	

*\* NOT recommended for silicone.*

*Damage to the unit will result if used with silicone.*

Label:

